


# Indicator Panels

## IPN/025 - "BRAND"

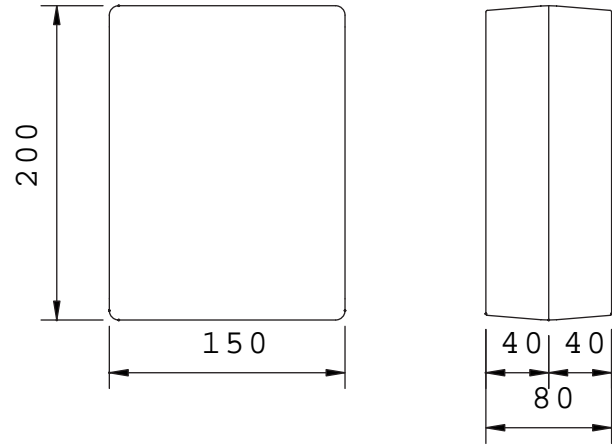

Latest technology Light Emitting Diodes (LEDs) configured into a high-density matrix providing a dedicated, clear, distinct and insistent warning signal. Standard unit features the word "BRAND" in Red with Red lens; other colours are available from a choice of Red, Green, Blue or White, available to special quotation/order.

Units can be set to either Pulsed or Static as well as one of 2 pre-set intensity levels (100%, or 25%) using internal jumper-links.

24Vdc, 115Vac and 230Vac models are available featuring simple 2-wire connection for straightforward integration into your system.

All units are enclosed in an IP65 UV-stabilised polycarbonate housing (200x150x80mm) for protection against the elements.

		IPN/DC/24/LED/025/Red	IPN/AC/115/LED/025/Red	IPN/AC/230/LED/025/Red
Supply Voltage		24Vdc	115Vac	230Vac
Minimum Supply Voltage		20Vdc	98Vac	195Vac
Maximum Supply Voltage		27Vdc	132Vac	265Vac
Average Current Draw	100%	204mA Static / 105mA Pulsed	70mA Static / 61mA Pulsed	34mA Static / 30mA Pulsed
	25%	58mA Static / 34mA Pulsed	57mA Static / 54mA Pulsed	28mA Static / 26mA Pulsed
Peak Operating Current	100%	204mA Static / 204mA Pulsed	95mA Static / 94mA Pulsed	50mA Static / 51mA Pulsed
	25%	204mA Static / 204mA Pulsed	90mA Static / 89mA Pulsed	46mA Static / 46mA Pulsed
Nominal power consumption		4.9W	7.2W	7.0W
Flash Rate (Pulsed option)			120 FPM (2Hz)	
Luminous Intensity	100%		200Cd	
	25%		50Cd	
Angle of max rated brilliance			On axis with front face	
Recommended fuse rating			Internal - 1A TD	
IEC protection class			IP65	
Operating Temperature Range			-20 to +55 Degrees C	
Net Product Weight		640g	800g	800g