



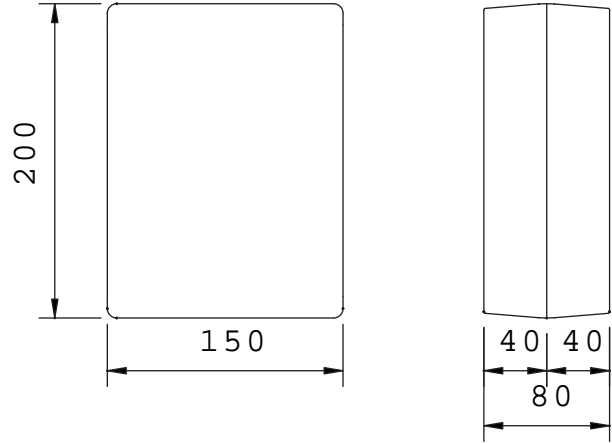

Indicator Panels

IPN/018 - Mini Traffic Light

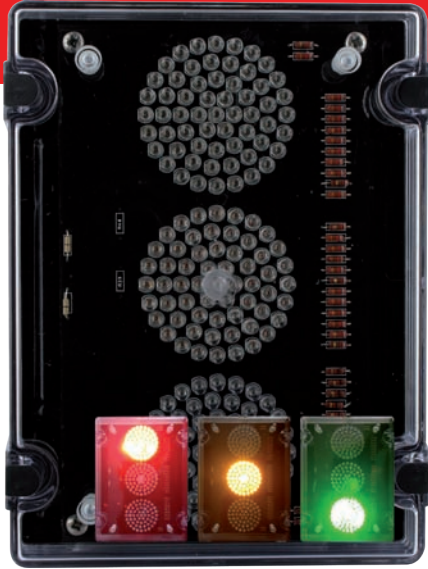

3-way LED Traffic Light ideally suited to a wide variety of applications.

Standard 24Vdc (ac or dc), 115Vac and 230Vac models are available and all units are enclosed in an IP65 UV-stabilised polycarbonate housing (200x150x80mm) for protection against the elements.

Function selection by applying power to relevant terminals with simple four-wire connection.

Individual Red, Amber and Green LED arrays with clear lens; other colours are available to special order.

		IPN/DC/24/LED/018/R/A/G	IPN/AC/115/LED/018/R/A/G	IPN/AC/230/LED/018/R/A/G
Supply Voltage		24Vdc	115Vac	230Vac
Minimum Supply Voltage		20Vdc	98Vac	195Vac
Maximum Supply Voltage		27Vdc	132Vac	265Vac
Average Current Draw	Red	203mA	67mA	33mA
	Amber	206mA	67mA	33mA
	Green	114mA	52mA	26mA
Peak Operating Current	Red	203mA	90mA	45mA
	Amber	206mA	91mA	51mA
	Green	114mA	69mA	36mA
Nominal power consumption	Red	4.9W	7.1W	7.0W
	Amber	5.0W	7.1W	7.0W
	Green	2.7W	5.2W	5.3W
Luminous Intensity	Red		225Cd	
	Amber		355Cd	
	Green		400Cd	
Angle of max rated brilliance			On axis with front face	
Recommended fuse rating			Internal - 1A TD	
IEC protection class			IP65	
Operating Temperature Range			-20 to +45 Degrees C	
Net Product Weight		690g	1195g	1195g