
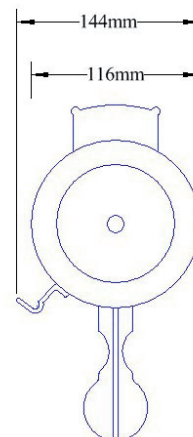


Hand-cranked Sirens

HDS-1

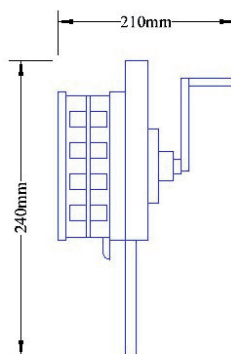

Cast aluminium siren designed as a back-up alarm when there is a power failure or for applications where no electricity is available.

Siren is held in one hand whilst the drive-handle is being cranked with the other.

Additional finger-trigger to adjust sound as needed.

Simple, maintenance free siren with a sealed gearbox.

HDS-1	
Supply Voltage	Hand-operated - Does not require electrical power
Sound frequency	500Hz
Sound output @ 1m	105dB(A)
Approximate range	500 - 1000m in still air on open field
Duty Cycle	Continuous
Operating Temperature Range	-10 to +45 Degrees C
Net Product Weight	1.2kg
Mounting	Holding the handle at the bottom of the siren and with the other hand turn the crank-handle to operate the siren.