



# Revolving LED Beacons Series B

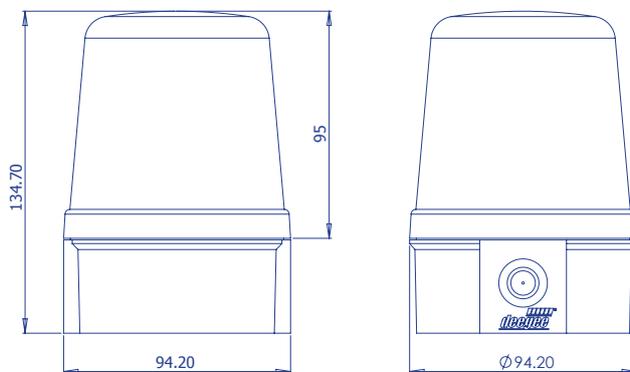

Solid-state LED beacon with revolving (simulated rotating) light effect. 360 degree 'all-round' visibility and no moving parts.

Series B is an IP66 rated enclosure, pre-moulded with drill-outs for M10 and M20 cable gland entries.

The lens fits with a specially designed O-ring and tightens on a bayonet-style fitting, securing with an anti-tamper screw into a blind hole.

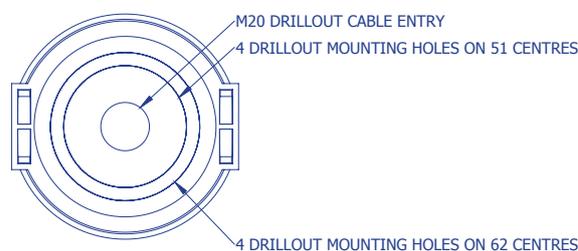

Coloured LEDs with matching colour lens for optimum balance of light transmission and signal contrast. Available in Red, Amber, Green, Blue and Clear signals with a choice of Red or White base.

Carefully designed to minimise dust and dirt build-up, and fully water-tight, Series B is perfectly suited to the outdoor environment, and with long-life LEDs, makes maintenance a thing of the past.

	RFB/DC/12/LED	RFB/DC/24/LED	RFB/UC/115-230/LED
Supply Voltage	12Vdc	24Vdc	115-230Vuc
Minimum Supply Voltage	10.2Vdc	20.4Vdc	97Vuc
Maximum Supply Voltage	13.8Vdc	27.6Vdc	265Vuc
Average Current Draw	43mA@12Vdc	27mA@24Vdc	17mA @ 115Vac / 10mA @ 230Vac
Peak Operating Current	59mA@13.8Vdc	29mA@27.6V	72mA @ 115Vac / 46mA @ 230Vac
Nominal power consumption	0.52W	0.93W	1.0W
Flash Rate	120rpm 2Hz		
Luminous Intensity	Red	Cd	
	Amber	Cd	
	Green	Cd	
	Blue	Cd	
	Clear	Cd	
Angle of max rated brilliance	0 Degrees vertical		
Recommended fuse rating	external - 500mA TD		
IEC protection class	IP66		
Operating Temperature Range	-20 to +55 Degrees C		
Net Product Weight	209g	209g	213g

