


LED Beacons

Series C - Low-Power

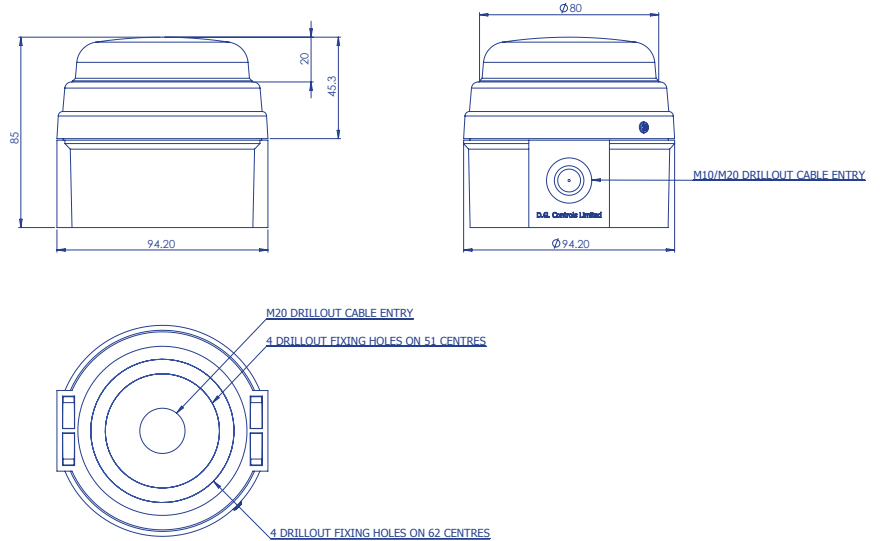

Low-power LED multi-function beacon with 8 operating modes that are selected by way of a 3-way DIP switch.

Extensively configurable, comprising a robust White (standard) or Red (option) ABS Base, and a Polycarbonate lens. Multiple units can be joined together, including the matching IAS-C Sounder, to provide an integrated signalling system.

Operating mode is easily configured at installation with a choice of:

Static
Slow Pulse
Triple Flash
Strobe - 1 pulse per second (1Hz)

Standard Pulse
Fast Pulse
Random Flash
Mixed Flash (250+125+55+55 mS).

		PSC/DC/24/4PL
Supply Voltage		24Vdc
Minimum Supply Voltage		20Vdc
Maximum Supply Voltage		27.6Vdc
Average Current Draw		40mA
Peak Operating Current		100mA @ 27.6Vdc
Nominal power consumption		< 1W
Flash Rate		120fpm 2Hz with Static (0Hz) option and further 6 operating modes
Luminous Intensity	Red	22Cd
	Amber	22Cd
	Green	18Cd
	Blue	8Cd
	Clear	Cd
Angle of max rated brilliance		On axis with front face
Recommended fuse rating		External - 500mA TD
IEC protection class		IP65
Operating Temperature Range		-20 to +45 Degrees C
Net Product Weight		161g