




deegee
www.beaconlamps.com

General

Indicator Panels

IPN/024 - Arrow/"STOP"/Arrow

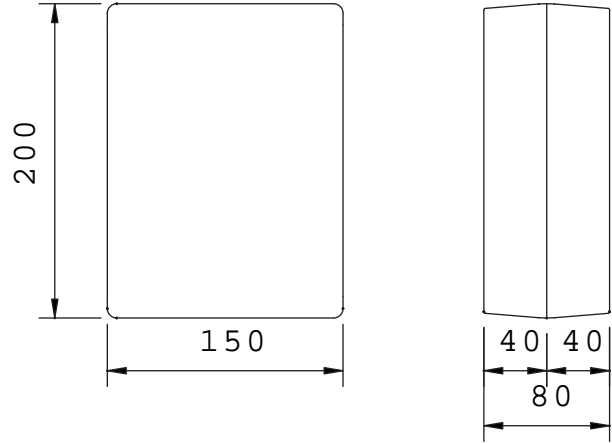

Automotive

Obstruction

Designed to signal Forward / Reverse / STOP IPN/024 utilises the latest technology Light Emitting Diodes (LEDs) and is ideally suited to a wide variety of applications such as loading-bay signalling, car-wash signalling, shutter door status, on-site traffic management, dockside signalling, factory control, etc.

Standard unit features the word "STOP" in Red, a single upward pointing Green arrow and a single downward pointing Amber arrow; other colours are available from a choice of Red, Green, Blue or White, available to special quotation/order. 24Vdc, 115Vac and 230Vac models are available.

Audible

Explosionproof

Accessories

		IPN/DC/24/LED/018/R/A/G	IPN/AC/115/LED/018/R/A/G	IPN/AC/230/LED/018/R/A/G
Supply Voltage		24Vdc	115Vac	230Vac
Minimum Supply Voltage		20Vdc	98Vac	195Vac
Maximum Supply Voltage		27Vdc	132Vac	265Vac
Average Current Draw	Red	180mA	61mA	31mA
	Amber	49mA	34mA	18mA
	Green	22mA	33mA	17mA
Peak Operating Current	Red	180mA	85mA	43mA
	Amber	49mA	46mA	23mA
	Green	22mA	55mA	30mA
Nominal power consumption	Red	4.5W	6.7W	6.7W
	Amber	1.2W	3.1W	3.2W
	Green	0.5W	2.2W	2.2W
Luminous Intensity	Red		250Cd	
	Amber		135Cd	
	Green		95Cd	
Angle of max rated brilliance			On axis with front face	
Recommended fuse rating			Internal - 1A TD	
IEC protection class			IP65	
Operating Temperature Range			-20 to +45 Degrees C	
Net Product Weight		665g	1140g	1140g