


Indicator Panels

IPN/002 - Stop/Go

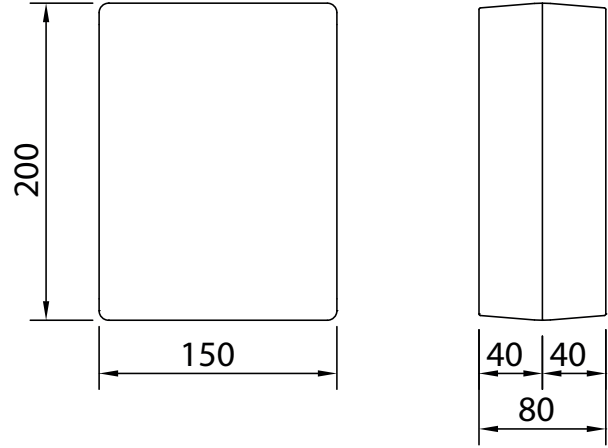

2-way LED Traffic Light ideally suited to a wide variety of applications such as Loading-Bay Signalling, Shutter Door Status, On-Site Traffic Management, Dock side Signalling, Factory Control, etc.

Units can be either set to one of 5 preset intensity levels (100%, 50%, 25%, 10% or 5%) using internal jumper-links. Alternatively, the unit can be configured to run at 100% with a single lower pre-set intensity level (100%, 50%, 25%, 10% or 5%) selectable by an external control signal.

Standard 24Vac/dc, 115Vac and 230Vac models are available and all units are enclosed in an IP65 UV-stabilised polycarbonate housing (200x150x80mm) for protection against the elements. 24Vac/dc unit maybe connected directly to your existing dock leveller or door control system.

Standard unit features one Red and one Green LED array with clear lens; other colours are available from a choice of Red, Green, Blue or White, available to special quotation/order.

		IPN/UC/24/LED/002/R/G	IPN/AC/115/LED/002/R/G	IPN/AC/230/LED/002/R/G
Supply Voltage		24Vuc	115Vac	230Vac
Minimum Supply Voltage		20Vuc	98Vac	195Vac
Maximum Supply Voltage		27Vuc	132Vac	265Vac
Average Current Draw	Red	180mA	62mA	28mA
	Green	104mA	57mA	23mA
Peak Operating Current	Red	240mA	230mA	102mA
	Green	155mA	220mA	98mA
Nominal power consumption	Red	4.3W	4.2W	4.5W
	Green	2.5W	3.3W	3.3W
Luminous Intensity	Red		230Cd	
	Green		405Cd	
Beam Angle	Red		29 degrees	
(FWHMA)	Green		27 degrees	
Angle of max rated brilliance			On axis with front face	
Recommended fuse rating			Internal - 1A TD	
IEC protection class			IP65	
Operating Temperature Range			-20 to +45 Degrees C	
Net Product Weight		695g	1000g	1000g

D G Controls Limited, Cadley Hill Road, Swadlincote, Derbyshire, UK, DE11 9TB
Tel: +44 1283 550850 Fax: +44 1283 550776 e-mail: mail@beaconlamps.com