
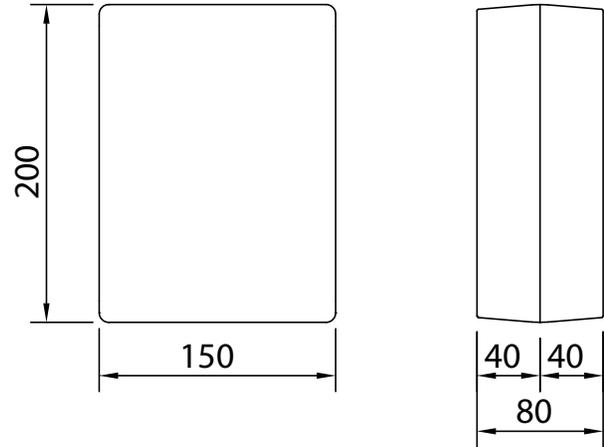


# Indicator Panels

## IPN/020 - "WAIT" / "ENTER"

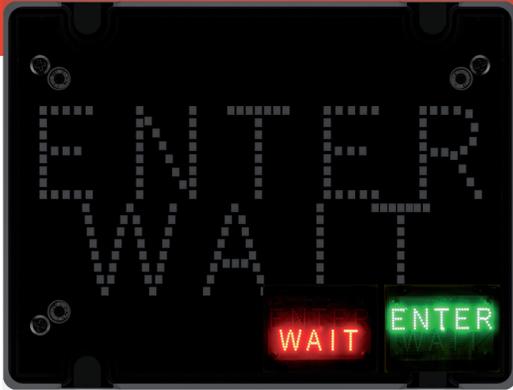

Latest technology Light Emitting Diodes (LEDs) configured into a high-density matrix and ideally suited to a wide variety of applications such as Loading-Bay Signalling, Shutter Door Status, On-Site Traffic Management, Dockside Signalling, Factory Control, etc.

Units can be either set to one of 5 pre-set intensity levels (100%, 50%, 25%, 10% or 5%) using internal jumper-links. Alternatively, the unit can be configured to run at 100% with a single lower pre-set intensity level (50%, 25%, 10% or 5%) selectable by an external control signal.

Standard 24Vdc, 115Vac and 230Vac models are available and all units are enclosed in an IP65 UV-stabilised polycarbonate housing (200x150x80mm) for protection against the elements.

Standard unit features a single the words "WAIT" and "ENTER" in Red and Green respectively; other colours are available from a choice of Red, Green, Blue or White, available to special quotation/order.

		IPN/UC/24/LED/020/R/G	IPN/AC/115/LED/020/R/G	IPN/AC/230/LED/020/R/G
Supply Voltage		24Vuc	115Vac	230Vac
Minimum Supply Voltage		20Vuc	98Vac	195Vac
Maximum Supply Voltage		27Vuc	132Vac	265Vac
Average Current Draw	Red	195mA	62mA	28mA
	Green	173mA	58mA	25mA
Peak Operating Current	Red	262mA	234mA	104mA
	Green	243mA	222mA	95mA
Nominal power consumption	Red	4.7W	4.3W	4.5W
	Green	4.2W	3.8W	3.8W
Luminous Intensity	Red		29Cd	
	Green		59Cd	
Angle of max rated brilliance			On axis with front face	
Recommended fuse rating			Internal - 1A TD	
IEC protection class			IP65	
Operating Temperature Range			-20 to +45 Degrees C	
Net Product Weight		643g	992g	992g