


Hand-cranked Sirens

HDS-2

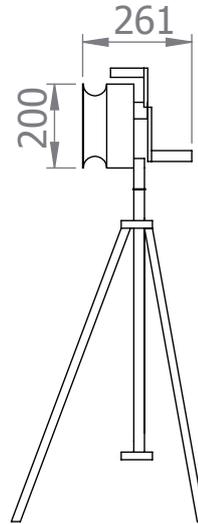

Die cast aluminium siren with tripod designed as a back-up alarm when there is a power failure or for applications where no electricity is available.

Siren sits on tripod whilst the drive-handle is being cranked.

Simple, maintenance free siren with a sealed gearbox & crank handle with ratchet.

HDS-2	
Supply Voltage	Hand-operated - Does not require electrical power
Sound frequency	500Hz
Sound output @ 1m	115dB(A)
Approximate range	1000m in still air on open field
Duty Cycle	Continuous
Operating Temperature Range	-10 to +45 Degrees C
Net Product Weight	5.1kg
Mounting	The unit is shipped with the siren & tripod separated in one box. Turning the hand nut loose allows you to mount the siren on top of the tripod stand. Placing the siren on the tripod, tighten the nut until the siren is secure. Holding the handle on top of the siren, the crank handle can then be turned in a clockwise direction to operate the siren.